


## PTFE-lined dip pipes

- DIN 2848/2874
- DN 15 - DN 400
- Standard version: fixed flanges
- Carbon steel body

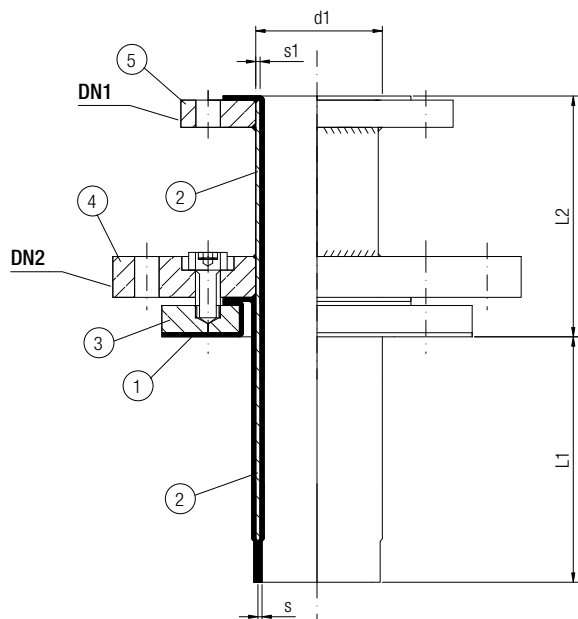

### Materials

- |   |                          |
|---|--------------------------|
| 1 | PTFE ASTM D-4894 or 4895 |
| 2 | St 37.0 - DIN 1629       |
| 3 | St 37.2 - DIN 17100      |
| 4 | St 37.2 - DIN 17100      |
| 5 | St 37.2 - DIN 17100      |

### Available on request

- 1 loose flange
- Vacuum resistance
- Antistatic PTFE
- Stainless steel body
- Higher diameters on request
- Length up to 5 m

| DN1 | DN2        | L1 max. ± 5 mm | L2 max. ± 5 mm | d1 x s1      | s ± 10% mm  | Peso ca. kg/Weight |
|-----|------------|----------------|----------------|--------------|-------------|--------------------|
| 15  |            | 2500           | 150            | 26,9 x 2,3   | 2,5         | 1,3                |
| 20  |            | 2500           | 150            | 26,9 x 2,3   | 3,0         | 1,5                |
| 25  | on request | 2500           | 150            | 33,7 x 2,6   | 3,0         | 2,0                |
| 32  |            | 2500           | 150            | 42,4 x 2,6   | 3,0         | 2,8                |
| 40  |            | 2500           | 150            | 48,3 x 3,2   | 3,0         | 3,4                |
| 50  |            | 2500           | 150            | 60,3 x 4,5   | 3,0         | 4,8                |
| 65  |            | 2500           | 150            | 76,1 x 4,0   | 3,0         | 6,4                |
| 80  |            | 2500           | 150            | 88,9 x 4,5   | 3,0         | 8,2                |
| 100 |            | 2500           | 150            | 114,3 x 5,0  | 4,5         | 11,5               |
| 125 |            | 2500           | 150            | 139,7 x 5,6  | 4,5         | 18,0               |
| 150 |            | 2500           | 150            | 168,3 x 6,3  | 5,0         | 28,7               |
| 200 |            |                | 2500           | 150          | 219,1 x 6,3 | 5,0                |
| 250 |            | 2500           | 150            | 273 x 10,0   | 5,2         | 57,0               |
| 300 |            | 2500           | 200            | 323,9 x 7,5  | 6,5         | 76,0               |
| 400 |            | 2500           | 200            | 406,4 x 10,0 | 6,5         | 120                |